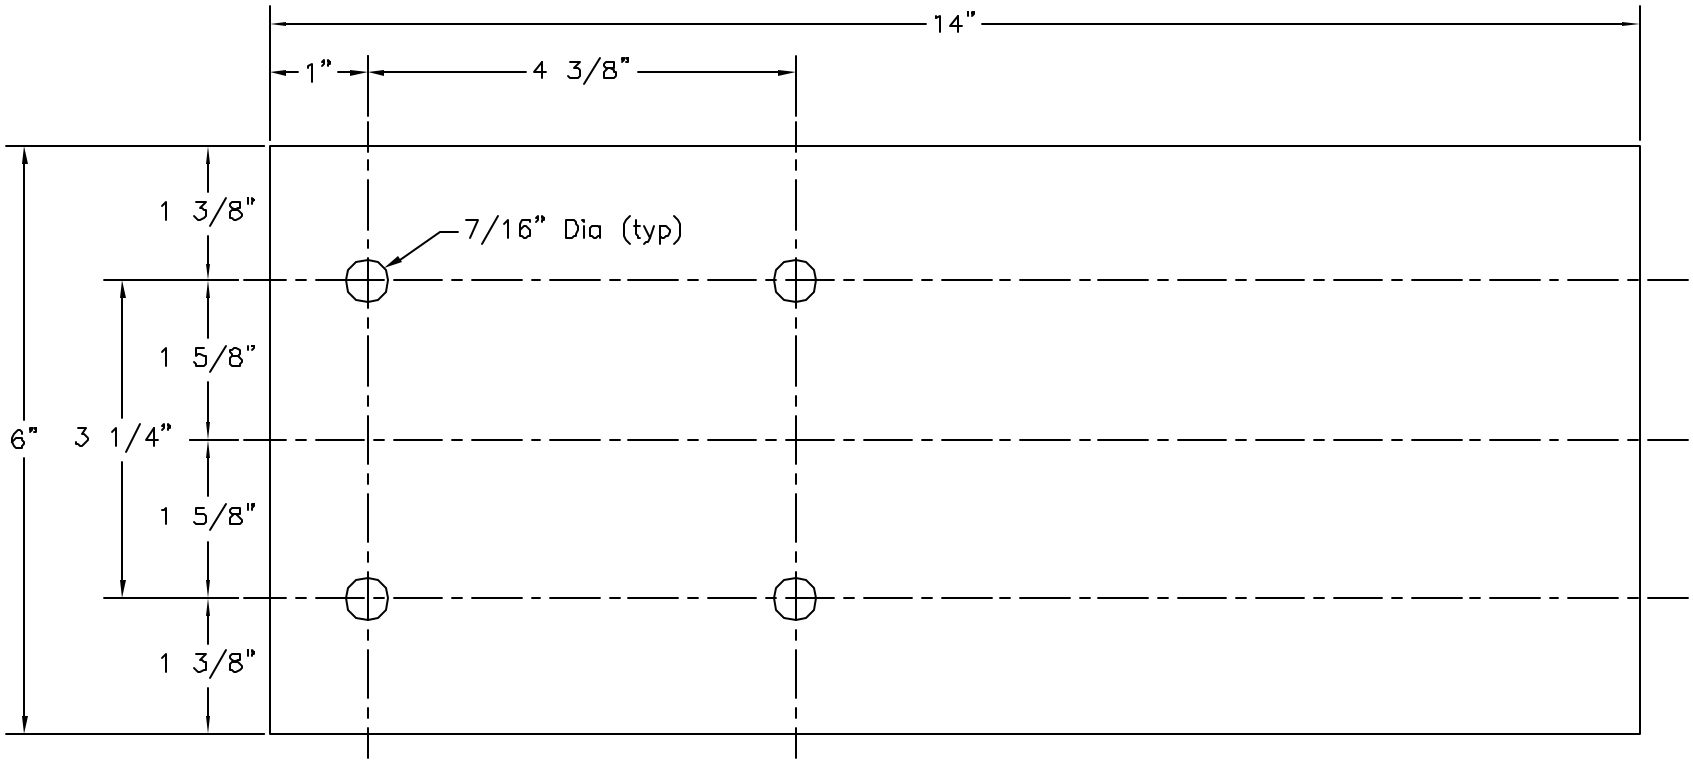

Quantity – 14 pieces
Preferred Material – C 6 x 8.2
Alternate Material – C 6 x 10.5

NOTES:

1. All pieces are saw cut
2. Remove all mill scale and clean to white metal
3. All pieces power coated with a flat black coating.

Allied Safety Engineering
August 21, 2007

Sketch1 – Cable Reel Mount
Cell – 305-849-2875